

Technical data sheet

FS240-1

EN361 EN358 EN813


The FALL SAFE® FS240-1 - FLASH VERTIX HARNESS, was developed for ladder climbers. With 2 front ladder loops, its design allows a comfortable work. In case of a fall, the zig zag stitches will open and the lower loops will rise until the chest, avoiding back injuries.

It's fully adjustable with increased comfort for the most intense work at heights in any hanging direction. Extremely easy to wear, this harness opens totally, allowing it to be dressed as a jacket.

The airflow through all the harness layers is assured by the new and improved Croc 3.0 padding. This innovation also allows for a lighter and more ergonomic final product, that is extremely comfortable for use for several hours.





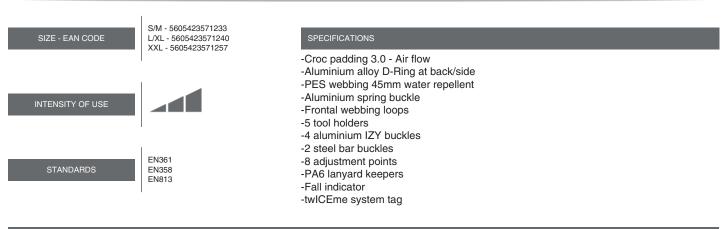

MAX. RATED LOAD 140 Kg MAX. SERVICE LIFE 10 years SIZE I WEIGHT S/M - 3.30 Kg L/XL - 3.64 Kg	PROPERTIES	
	MAX. RATED LOAD	140 Kg
S/M - 3.30 Kg L/XL - 3.64 Kg	MAX. SERVICE LIFE	10 years
XXL - 3.89 Kg	SIZE I WEIGHT	S/M - 3.30 Kg L/XL - 3.64 Kg XXL - 3.89 Kg

) ARBORISM RESCUE PLATFORMS TACTICAL OFFSHORE ROOF ROPE TELECOM TOWER CONFINED RIGGERS WIND CONSTR SCAFF WOOD ACCESS TOWERS CLIMBING SPACES TURBINES UCTION OLDING POLES WORKS

FALL SAFE® - Zona Industrial da Varziela, Rua B, Lote 54, 4480-620 Vila do Conde, PORTUGAL I Tel.: +351 252 480 060 | Fax.: +351 252 480 069 | Website: www.fallsafe-online.com Copyright © 2022-2023 FALL SAFE®, All rights reserved. All pictures shown are for representation purpose only. The products may vary due to product enhancement. Products and specifications are subject to change without notice.